
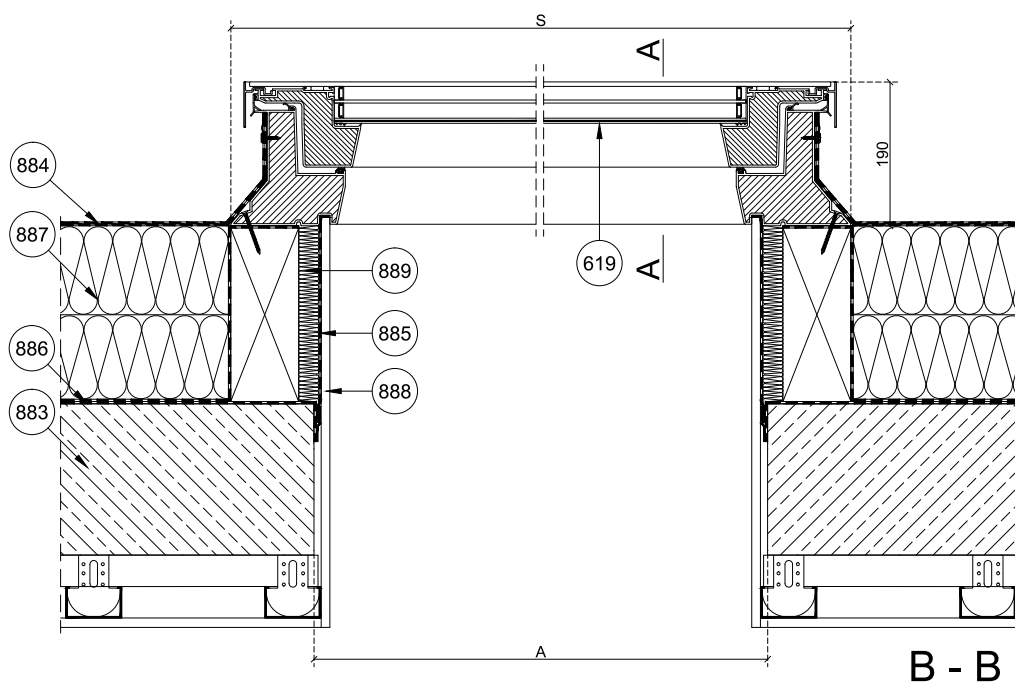



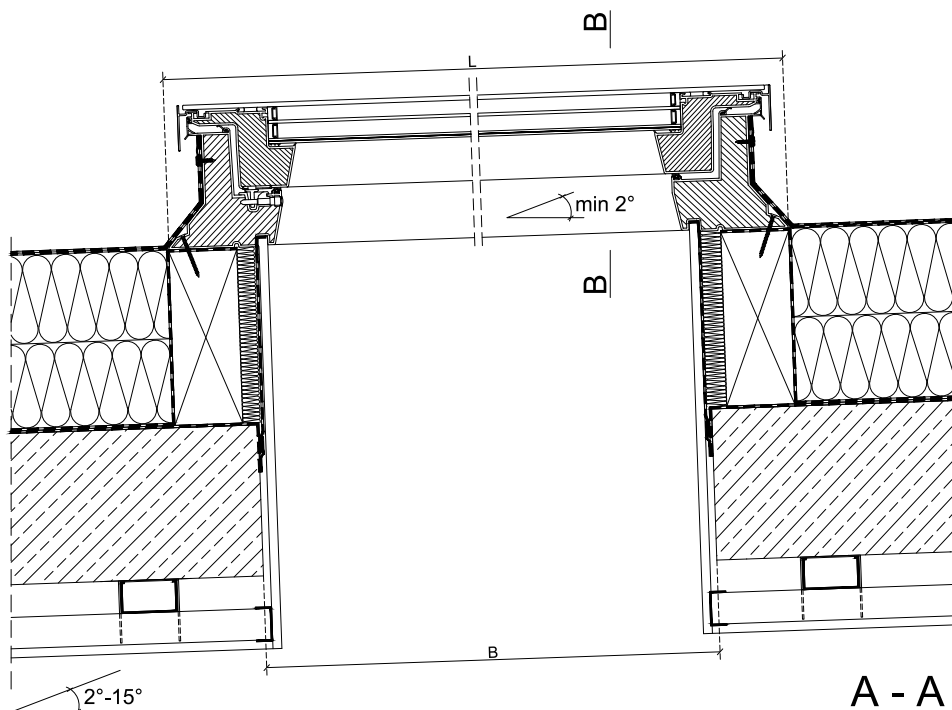

884-water proofing system
 887-rigid thermal insulation
 886-vapour control layer
 883-structural deck e.g concrete
 889-Thermal insulation
 885-vapour barrier membrane
 888-Plasterboard
 619-DEF DU6 Flat Roof Window,
 electrically opened

B - B

DEF DU6

A[mm]	B[mm]	Window symbol	S[mm]	L[mm]
600	600	01	820	820
	900	02	820	1120
700	700	03	920	920
	800	04	1020	1020
900	600	31	1120	820
	900	05	1120	1120
	1200	06	1120	1420
1000	1000	07	1220	1220
	1500	10	1220	1720
	900	32	1420	1120
1200	1200	08	1420	1420
	2200	11	1420	2420
1400	1400	09	1620	1620
1500	1000	33	1720	1220
2000	1000	34	2220	1220

FAKRO

DEF DU6



BITUMINOUS ROOFING
EPDM



2° - 15°



Warning! The present drawing is for informational-demonstrative purposes only and as such cannot constitute a basis for performance. All dimensions presented in this drawing should be verified on site. Because of the fact that the drawing is a schematic one, FAKRO shall not assume any responsibility for the actual installation quality on the roof. This drawing is FAKRO's property and cannot be published or used publicly without our written consent.

Vertical and horizontal cross-section:
 DEF DU6 Flat Roof Window, electrically opened, Flat

FORMAT:
A4

SCALE:
1:10/1:5

DATE:
09.2024